


Metrische einreihige Kegelrollenlager
Metric Single Row Tapered Roller Bearings

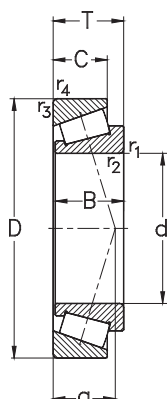

Hauptabmessungen [mm]			Tragzahlen [kN]			Referenzdrehzahlen [min ⁻¹]	Grenzdrehzahlen [min ⁻¹]	Gewicht [kg]	Lagertype	
Boundary dimensions [mm]			Load ratings [kN]			Thermal speed ratings [rpm]	Limited speed ratings [rpm]	Weight [kg]	Designation	
d	D	T	C _r dyn.	C _{0r} stat.	C _u	n _{0r}	n _G	m	DIN 720	ISO 355
30	72	20,75	45,9	48,3	5,5	5700	9500	0,41	31306	T7FB030
	72	28,75	79	88	10,2	6300	10000	0,59	32306	T2FD030
35	62	18	46,3	62	7,5	6800	11000	0,23	32007-X	T4CC035
	72	18,25	58	64	7,8	5900	9500	0,32	30207	T3DB035
	72	24,25	68	81	9,4	5600	9500	0,43	32207	T3DC035
	72	28	83	102	12,4	6200	9500	0,59	33207	T2DE035
	80	22,75	73,6	75,8	8,5	6000	9000	0,53	30307	T2FB035
	80	22,75	60,5	65,5	7,6	5100	8500	0,54	31307	T7FB035
	80	32,75	97	114	13,4	5900	9000	0,83	32307	T2FE035
40	68	19	52	68	8,3	6300	9500	0,29	32008-X	T3CD040
	75	26	82	107	13,1	5500	9000	0,52	33108	T2CE040
	80	19,75	68	75	9,2	5300	8500	0,43	30208	T3DB040
	80	24,75	77	90	10	4900	8500	0,56	32208	T3DC040
	80	32	114	142	17,4	5600	8500	0,74	33208	T2DE040
	85	33	121	150	18,3	6200	8000	0,9	--	T2EE040
	90	25,25	89	99	11,4	5300	8000	0,77	30308	T2FB040
	90	25,25	80	82	9,5	4600	7500	0,75	31308	T7FB040
	90	35,25	119	145	17	5200	8000	1,2	32308	T2FD040
45	75	20	62	84	10,3	5500	8500	0,33	32009-X	T3CC045
	75	24	76	106	12,9	5800	8500	0,43	33009	T2CE045
	80	26	89	122	14,9	4900	8000	0,53	33109	T3CE045
	85	20,75	74	85	10,4	5000	8000	0,5	30209	T3DB045