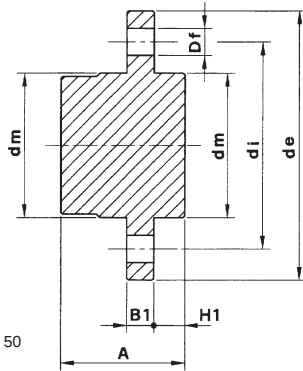


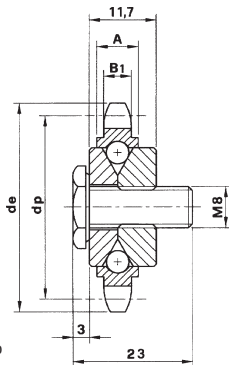
Canhões desmontáveis para Coroas



Material Fe 50

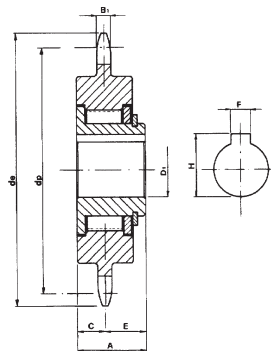
NR.	D ₁	de	di	dm	A	D _f	B ₁	H ₁
30	8	55	45	30	20,0	4,2	4	3,0
40	10	70	58	40	25,2	5,2	5	5,2
50	14	80	67	50	32,0	6,2	7	7,0
60	16	90	76	60	38,7	6,2	7	9,8
70	20	110	94	70	45,5	8,2	8	10,8
80	25	130	107	80	55,0	8,2	12	15,8
100	30	170	140	100	73,0	10,2	15	18,0
140	35	220	182	140	83,0	12,2	20	23,0

Carretos tensores de correntes, com esferas


Material: C 10
Cementado e temperado


Z	P	de	dp	A	B
12	3/8" x 5/32" x 6,35	40	36,80	7	3,5
10	1/2" x 1/8" x 7,75	46	41,10	7	3,0
10	1/2" x 3/16" x 7,75	46	41,10	7	4,5

Roda livre industrial


Material 18 NiCrMo 5
Cementado e temperado

Z	P	de	dp	A	C	E	B ₁	D ₁	F	H
13	1/2" x 1/8" x 7,75	59,4	53,06	14,8	6	8,8	3	12	4	13,7

Rodas para correntes "SLAT BAND"

P. 1" 1/2
Segundo DIN 8153


Material Fe 50

Z	de	dm	D ₁	L
15	93,7		16	42,5
17	105,5		16	42,5
19	117,3		16	42,5
21	129,2		20	42,5
23	141,2		20	42,5
25	153,2		20	42,5
27	165,2		20	42,5
29	177,2		20	42,5
31	189,3		20	42,5