


Correntes de Rolos - Placa Direita

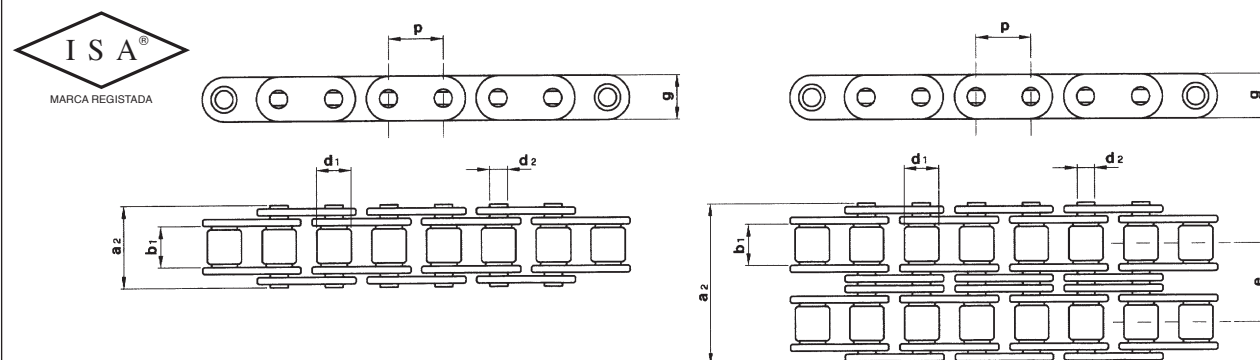


CORRENTES DE ROLOS SIMPLES - DIN 8187

ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	F ₈ min. N	q kg / m ≈
	mm	polegadas							
08B-1	12,7	1/2"	7,75	4,45	8,51	17,0	11,5	18.900	0,78
10B-1	15,875	5/8"	9,65	5,08	10,16	19,6	13,9	22.700	1,03
12B-1	19,05	3/4"	11,68	5,72	12,07	22,7	16,1	29.500	1,30
16B-1	25,4	1"	17,02	8,28	15,88	36,1	21,0	58.000	2,90
20B-1	31,75	1 1/4"	19,56	10,19	19,05	43,2	26,2	95.000	4,15

CORRENTES DE ROLOS DUPLA - DIN 8187

ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	e mm	F ₈ min. N	q kg / m ≈
	mm	polegadas								
10B-2	15,875	5/8"	9,65	5,08	10,16	36,2	13,9	16,59	45.400	1,95
12B-2	19,05	3/4"	11,68	5,72	12,07	42,2	16,1	19,46	59.000	2,60
16B-2	25,4	1"	17,02	8,28	15,88	68,0	21,0	31,88	110.000	5,70
20B-2	31,75	1 1/4"	19,56	10,19	19,05	79,7	26,2	35,45	180.000	7,80

Correntes de Rolos - Pino Ôco

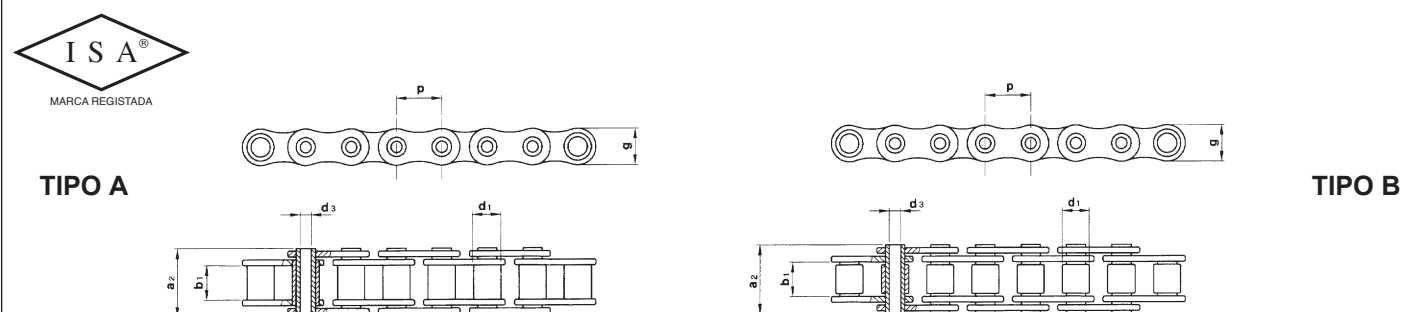

ISO Nr.	p		b ₁ mm min.	d ₂ mm	d ₁ mm max.	a ₂ mm max.	g mm max.	F ₈ min. N	q kg / m ≈	Tipo
	mm	polegadas								
08B-1	12,7	1/2"	7,75	4,50	8,51	17,0	11,6	9.400	0,59	A
10B-1	15,875	5/8"	9,65	5,13	10,16	19,6	14,5	12.800	0,73	A
12B-1	19,05	3/4"	11,68	5,85	12,07	22,7	15,9	12.800	0,90	A
08B-1	12,7	1/2"	7,75	4,50	8,51	17,0	11,6	10.800	0,59	B
10B-1	15,875	5/8"	9,65	5,13	10,16	19,6	14,5	14.700	0,77	B
12B-1	19,05	3/4"	11,68	5,85	12,07	22,7	15,9	16.700	1,02	B
12A-1	19,05	3/4"	12,70	5,97	11,91	25,0	18,0	25.000	1,30	B
16B-1	25,4	1"	17,02	8,33	15,88	36,1	21,0	32.800	2,25	B