


Guias de Correntes em Polietileno

Perfil "T" para Correntes Simples


Código	Corrente	ISO	B	A	b	a
T 0	3/8" x 7/32"	06 B 1	15	10	5,4	1,5
T 1	1/2" x 5/16"	08 B 1	20	10-15-20	7,4	2,2
T 2	5/8" x 3/8"	10 B 1	20	10-15-20	9,2	2,6
T 3	3/4" x 7/16"	12 B 1	25	10-15-20	11,3	2,4
T 4	1" x 17,02 mm	16 B 1	40	15-20	16,5	3,5
*T 5	1" 1/4 x 3/4"	20 B 1	45	15-20	19,0	4,3
*T 6	1" 1/2 x 1"	24 B 1	60	15-20	24,6	5,6
*T 7	1" 3/4 x 31 mm	28 B 1	75	20	30,0	6,9
*T 8	2" x 31 mm	32 B 1	80	20	30,0	7,8



* Fabricado sob encomenda

Perfil "T" para Correntes Duplas


Código	Corrente	ISO	B	A	b	a	c
T 0.2	3/8" x 7/32"	06 B 2	25	10	5,4	1,5	15,74
T 1.2	1/2" x 5/16"	08 B 2	35	10-15-20	7,4	2,2	21,42
T 2.2	5/8" x 3/8"	10 B 2	40	10-15-20	9,2	2,6	25,79
T 3.2	3/4" x 7/16"	12 B 2	45	15-20	11,3	2,4	30,76
T 4.2	1" x 17,02 mm	16 B 2	65	15-20	16,5	3,5	48,38
*T 5.2	1" 1/4 x 3/4"	20 B 2	70	15-20	19,0	4,3	54,45
*T 6.2	1" 1/2 x 1"	24 B 2	88	20	24,6	5,6	72,96
*T 7.2	1" 3/4 x 31 mm	28 B 2	105	25	30,0	6,9	89,56
*T 8.2	2" x 31 mm	32 B 2	105	30	30,0	7,8	88,55



* Fabricado sob encomenda

Perfil "T" para Correntes Triplas

Código	Corrente	ISO	B	A	b	a	c
T 0.3	3/8" x 7/32"	06 B 3	35	10	5,4	1,5	25,88
T 1.3	1/2" x 5/16"	08 B 3	45	10-15-20	7,4	2,2	35,24
T 2.3	5/8" x 3/8"	10 B 3	55	10-15-20	9,2	2,6	42,38
T 3.3	3/4" x 7/16"	12 B 3	60	15-20	11,3	2,4	50,22
*T 4.3	1" x 17,02 mm	16 B 3	95	20	16,5	3,5	80,26

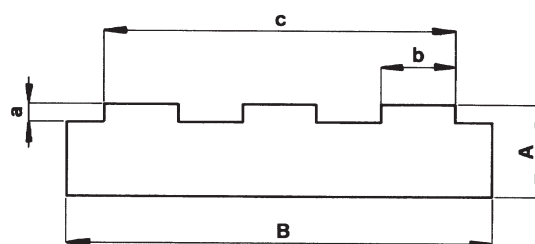

* Fabricado sob encomenda