


Metrische einreihige Kegelrollenlager
Metric Single Row Tapered Roller Bearings

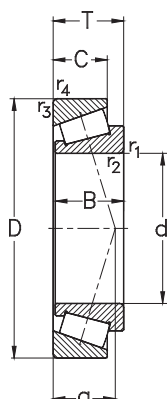

Hauptabmessungen [mm]			Tragzahlen [kN]			Referenzdrehzahlen [min ⁻¹]	Grenzdrehzahlen [min ⁻¹]	Gewicht [kg]	Lagertype	
Boundary dimensions [mm]			Load ratings [kN]			Thermal speed ratings [rpm]	Limited speed ratings [rpm]	Weight [kg]	Designation	
d	D	T	C _r dyn.	C _{0r} stat.	C _u	n _{0r}	n _G	m	DIN 720	ISO 355
45	85	24,75	87	99	11,5	4500	8000	0,57	32209	T3DC045
	85	32	118	153	18,6	5100	7500	0,79	33209	T3DE045
	95	29	90	112	13,65	5500	7500	0,92	--	T7FC045
	95	36	147	186	22,68	5500	7000	1,2	--	T2ED045
	100	27,25	110	124	14,6	4800	7000	0,96	30309	T2FB045
	100	27,25	100	105	12,5	4200	6700	1	31309	T7FB045
	100	38,25	145	185	22	4700	7000	1,5	32309	T5FD045
50	80	20	65	92	11,2	5100	8000	0,42	32010-X	T3CC050
	80	24	81	115	14	5300	8000	0,42	33010	T2CE050
	85	26	92	110	13,4	4800	7500	0,6	33110	T3CE050
	90	21,75	80	94	11,5	4700	7500	0,54	30210	T3DB050
	90	24,75	85	105	12,3	4200	7500	0,6	32210	T3DC050
	90	32	122	163	19,9	4700	7000	0,85	33210	T3DE050
	100	36	154	200	24,4	4400	7500	1,3	--	T2ED050
	105	32	108	137	16,6	4300	6300	1,2	--	T7FC050
	110	29,25	137	144	17,1	4400	6300	1,3	30310	T2FB050
	110	29,25	115	123	14,5	4000	6000	1,4	31310	T7FB050
	110	42,25	180	225	27	4400	6300	1,9	32310	T5FD050
55	90	23	85	121	14,8	4700	7000	0,58	32011-X	T3CC055
	90	27	100	150	18,2	4800	7000	0,67	33011	T2CE055
	95	30	114	160	19,5	4300	6700	0,89	33111	T3CE055
	100	22,75	98	116	14,1	4200	6700	0,7	30211	T3DB055